

# Silent Induct Fans and Shower Kits (100mm)



Silent fans are 70% quieter than standard axial fans when operating

Available as replacement duct fans or complete as a kit

Basic and timer control options

## Accessories

### GG42

100 external louvred wall vent available in white or brown.



### GFP4.3

100mm Flexible PVC ducting (including 2 plastic fixing clips).




## Physical Specifications


**Weight:** SRD100 Induct Fan – 0.61 kg  
SRD100 Shower Kit – 1.3kg

**Material:** ABS plastic

## Dimensions

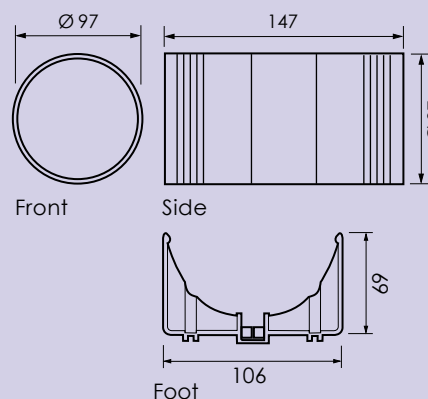

## Performance Graph

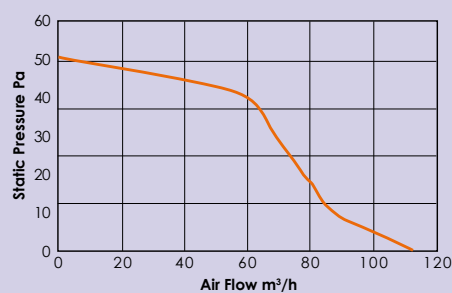

## Electrical Specifications

230V~50Hz Class II

**Consumption:** 16W

**Cabling:** 2 core: 1mm<sup>2</sup> max.  
3 core: 1/1.5mm<sup>2</sup> max.

## Data Table

	Performance to BS 848 P11 in free air		Sound Pressure level @ 3m		IP Rating	Operation	Features
	m <sup>3</sup> /h <sup>-1</sup>	l.s <sup>-1</sup>	dB(A)				
SRD100	110	31	20	44		Single speed	100mm basic induct fan
SRD100T	110	31	20	44		Single speed	100mm timer induct fan
SR100BSK *	55	15	24	44		Single speed	100mm basic shower kit
SR100TSK *	55	15	24	44		Single speed	100mm timer shower kit

\* Installed performance with 3 metres of flexiduct